



Get it all at Onevoip now!

How to Use actionvoip with your SIP device


You need a actionvoip username and password in order to call via our network. So first sign up with actionvoip by [downloading](#) and installing the application and create your login.

You can use actionvoip with the following types of **Sip devices**:

- SIP ATA (Analogue Telephone Adapter)
- SIP Router
- xDSL Modem


The most devices are equipped with a combination of the following ports.

Example 1

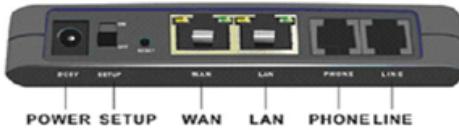

(this is merely an example layout, every type of device can be different)

Example 2

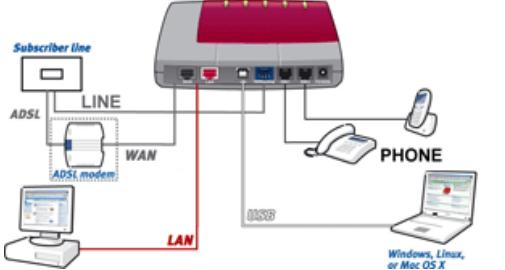

(this is merely an example layout, every type of device can be different)

- **(A)DSL:** connect your line from your (A)DSL provider (not available on a ATA)
- **WAN:** connect your line from your xDSL modem/router
- **LAN:** port for your (home) network, you can connect e.g. your PC, laptop, network-printer or wireless router
- **PHONE:** here you can connect your analogue telephone
- **LINE:** connect your analogue (PSTN) telephone line
- **USB:** you can connect PC or lap-top with a free USB port

Some SIP devices have more than one LAN port and/or PHONE port available.

For the hardware connections from your SIP device look at the above information and your user manual. After connecting the hardware you have to make sure that your software is installed and configured the right way.

Software configuration

General

- SIP port : 5060
- Registrar : sip.actionvoip.com
- Proxy server : sip.actionvoip.com
- Outbound proxy server : leave empty
- Account name : your actionvoip username
- Password : your actionvoip password
- Display name/number : your actionvoip username or voipnumber
- Stunserver (option) : stun.actionvoip.com

Super discount deals:

Destination

	EUR/min
hungary	0.5 ct
lithuania	0.5 ct
austria (mobile)	1.0 ct
czech republic (mobile)	4.0 ct
estonia (mobile)	8.0 ct
finland (mobile)	3.0 ct
lithuania (mobile)	3.0 ct
malta (mobile)	2.0 ct
norway (mobile)	5.0 ct
slovak republic (mobile)	4.0 ct

[Click here for more prices »](#)

Download the ACTIONVOIP software



Newsletter!

Stay in touch and sign up for our free newsletter to get the latest news and info directly in your mailbox.

Sign up for the newsletter:

Below are some examples of the software configuration of various popular SIP devices. Please also consult the manual that came with your SIP device

AVM Fritz!box FON 7050	(click here to expand)
AVM Fritz!box FON ATA 1020	(click here to expand)
LINKSYS WIP330	(click here to expand)
LINKSYS SPA3102	(click here to expand)
GRANDSTREAM HT286	(click here to expand)
GRANDSTREAM HT386	(click here to expand)
GRANDSTREAM HT486	(click here to expand)
GRANDSTREAM HT496	(click here to expand)
SIEMENS SX553	(click here to expand)
SMC 7908 VoWBRA	(click here to expand)
X-lite v3.0 Software	(click here to expand)

Codecs

- G.711 (64 kbps)
- G.726 (32 kbps)
- G.729 (8 kbps)
- G.723 (5.3 & 6.3 kbps)
- GSMFR (13.2 kbps)

If you have audio problems:

Use a STUN server (e.g. stun.actionvoip.com) with port 3478 (if supported by your device)

Use the G.711 codec

For more specific technical information, please visit the [FAQ](#).